



Attorney's Docket No.: 12758-024001
Client Ref. No.: 1998P02894WOUS

AF/ 2685
JFW

THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Michael Benz, *et al.*
Serial No. : 09/806,646
Filed : April 2, 2001
Title : METHOD AND RADIO COMMUNICATION SYSTEM FOR REGULATING
POWER BETWEEN A BASE STATION AND A SUBSCRIBER STATION

Art Unit : 2685
Examiner : Blane J. Jackson
Assignee : Siemens AG

Mail Stop Amendment
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

SUBMISSION OF CERTIFICATION

Further to the Amendment to the above application filed on October 12, 2004, Applicants submit herewith a certification for the original German Priority Document, namely German Patent No. 198 46 675.7. This certification is being submitted in order to have the Agin reference (U.S. Patent No. 6,337,988) removed as prior art against the application..

Applicants' undersigned attorney can be reached at the address shown below. All telephone calls should be directed to the undersigned at 617-368-2158.

Please apply any fees or credits due in this case, which are not already covered by check, to Deposit Account 06-1050 referencing Attorney Docket No. 12758-024001.

CERTIFICATE OF MAILING BY FIRST CLASS MAIL

I hereby certify under 37 CFR §1.8(a) that this correspondence is being deposited with the United States Postal Service as first class mail with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

10/26/2004
Date of Deposit

Damela M. de Thomas
Signature

PAMELA M. DE THOMAS
Typed or Printed Name of Person Signing Certificate

Applicants : Michael Benz, *et al.*
Serial No. : 09/806,646
Filed : April 2, 2001
Page : 2 of 2

Attorney's Docket No.: 12758-024001
Client Ref. No.: 1998P02894WOUS

Respectfully submitted,

Date: 10/26/04

Ruth J. Ma
Ruth J. Ma
Reg. No. 55,414

Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804
Telephone: (617) 542-5070
Facsimile: (617) 542-8906

20962904.doc



MERRILL
CORPORATION




225 VARICK STREET
NEW YORK, NY 10014 • PHONE: (212) 367-5970

State of New York)
)
County of New York) ss:


Certificate of Accuracy

This is to certify that the attached document, The Description, Claims, and the Amended Claims for Method and Radio Communication System for Controlling Power between a Base Station and a Subscriber Station, originally written in German, is, to the best of our knowledge and belief, a true, accurate and complete translation into English.

Dated: October 22, 2004


Thomas J. Tobin
Operations Manager, Translations
Merrill Corporation

Sworn to and signed before
Me this 22 day of
October, 2004

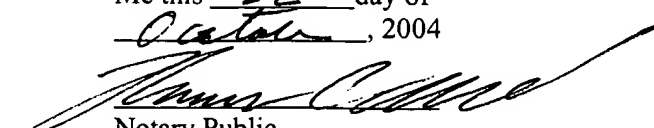
Notary Public

THOMAS C. ALWOOD
Notary Public, State of New York
No. 01AL6004438 Qualified in Kings County
Certificate Filed in New York County
Commission Expires: 3.26.2006

OFFICES IN MAJOR CITIES THROUGHOUT THE WORLD

Description

Method and radio communication system for controlling power between a base station and a subscriber station

5

The invention relates to a method and radio communication system for controlling power between a base station and a subscriber station, especially for CDMA transmission methods in broadband transmission channels.

10 In radio communication systems, information (for example voice, picture information or other data) is transmitted with the aid of electromagnetic waves via a radio interface. The radio interface relates to a connection between a base station and subscriber stations, where the subscriber stations can be mobile stations or stationary radio stations. The electromagnetic waves are radiated at carrier frequencies which are in the frequency band provided for the respective system. For future radio communication systems, for
15 example the UMTS (Universal Mobile Telecommunication System) or other third-generation systems, frequencies are provided in the frequency band of approx. 2000 MHz.

For the third generation of mobile radio, broadband radio interfaces ($B = 5$ MHz) are provided which use a CDMA (code division multiple access) transmission
20 method for differentiating among different transmission channels. The CDMA transmission method requires a continuous transmission power control which, as a rule, functions for both directions of transmission in the form of a closed control loop. For the up-link (the radio transmission from the mobile station to the base station), the base station evaluates transmissions of the mobile station with respect to the transmission quality and
25 transmits back to the subscriber station a transmission power correction instruction which is used by the subscriber station for controlling transmission power for subsequent transmissions.

From ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 8/25/1998, pages 29-30, it is known to specify a fixed increment for increasing or reducing the transmission power, which can only vary from radio cell to radio cell. Thus, the increment of transmission power correction is a static parameter. Specifying the increment statically, however, ignores certain dynamic characteristics of the transmission performance via the radio interface which, from time to time, causes an unnecessarily high interference in the radio communication system if the transmission power is too high or a transmission quality which is too poor if the transmission power is too low. It is an object of the invention to improve the transmission performance. This object is achieved in accordance with the method having the features of claim 1 and the radio communication system having the features of claim 16. Advantageous further developments can be found in the subclaims.

According to the invention, the transmissions of a second radio station are received in a first radio station and a transmission power correction instruction for the transmission power of the second radio station is determined. The transmission power correction instruction is transmitted during a subsequent transmission of the first radio station to the second radio station, whereupon the latter takes the transmission power correction instruction into consideration for adjusting the transmission power during one of its subsequent transmissions. In contrast to the prior art in broadband CDMA transmission methods, it is not a time-invariant and fixed increment which is used in changing the transmitting power but a transmission power correction instruction which is related to a variable increment of the transmission power adjustment. The variable increment is set by the radio stations in a subscriber-dependent and time-dependent manner.

The larger the increment, the faster wrong transmission power adjustments will be corrected, but at the cost of more inaccurate control. If the increment is small, the control is more accurate but the delay is greater until large deviations are corrected. Due to the variable

increment, the control can be adapted to all transmission conditions in a subscriber-dependent and time-dependent manner and the control can thus be improved. Improved control produces reduced interference and a transmission quality which is guaranteed for all connections.

5 According to an advantageous further development of the invention, a transmission condition for the connection is evaluated repetitively in time in the radio stations and the increment is increased or reduced with changes in the transmission condition. The transmission condition is one or a combination of the following parameters which cause a change in the control loop for the transmission power adjustment:

- 10 - an interruption in a continuous transmission mode for measuring purposes (slotted mode),
- a change in the asymmetry of utilization of radio resources of the radio interface in TDD mode between up-link and down-link,
- the speed of movement of the subscriber station,
- 15 - the number of transmitting and/or receiving antennas used,
- a length of time averaging of the signal evaluation at the receiver end,
- a length of the channel impulse response used during the signal detection,
- number of base stations which are in radio contact with the subscriber station in a macro-diversity transmission method.

20 By changing these transmission conditions, the control loop is interrupted for a certain time or, respectively, the time of interruption is changed or the quality of detection of the transmitted information is abruptly changed. These conditions can be met better by means of the variable increment.

 The control method is particularly suitable for radio interfaces which use a

25 CDMA

subscriber separation method in broadband transmission channels and in which a multiplicity of transmission conditions is possible which change the

control loop. Typical applications are the FDD (frequency division duplex) and TDD (time division duplex) mode in third-generation mobile radio systems. The control applies to up-link and down-link so that the first radio station is either the base station or the subscriber station.

5 The increment to be used is obtained from signaling, implicitly coded within the transmission power correction instruction transmitted or according to a correspondence table or calculation rule linking the different transmission conditions with the increments to be used. Combinations of these measures can also be used. The exemplary embodiments show which specifications are advantageous for which changes in transmission condition.

10 Exemplary embodiments of the invention will be explained in greater detail with reference to the attached drawings, in which:

Figure 1 shows a diagrammatic representation of a radio communication system,

Figure 2 shows a determination of the increment in "slotted mode",

Figure 3 shows a determination of the increment in the case of different conditions of asymmetry,

Figure 4 shows a determination of the increment in the case of different speeds of the mobile station,

Figure 5 shows a determination of the increment in the case of the use of a reception diversity method,

Figure 6 shows a determination of the increment in the case of "soft handover" of a mobile station, and

Figure 7 shows a control loop for adjusting the transmission power.

The mobile radio system shown in Figure 1 as an example of a radio communication system consists of a multiplicity of mobile

switching centers MSC which are networked together and, respectively, establish access to a landline network PSTN. These mobile switching centers MSC are also connected to in each case at least one facility RNM for allocating radio resources. Each of these facilities RNM, in turn, provides for a connection to at least one base station BS.

5 Such a base station BS can set up a connection to subscriber stations, e.g., mobile stations MS or other mobile and stationary terminals via a radio interface. Each base station BS forms at least one radio cell. Figure 1 shows a connection V for transmitting user information between a base station BS and a mobile station MS. A system for transmission power control of the radio link via this radio interface will be explained later, only the
10 transmission power adjustment of the mobile station MS being shown. Equivalent measures can be used for the reverse direction of transmission.

 An operation and maintenance center OMC effects control and maintenance functions for the mobile radio system or parts thereof. The functionality of this structure can be transferred to other radio communication systems in which the invention can be used,
15 especially for subscriber access networks with wireless subscriber access.

 The transmission power control is shown for radio transmission in the up-link UL. Transmission means TX of the mobile station MS send information in the up-link UL, a transmission power correction instruction TPC being taken into consideration for adjusting the transmission power. This transmission power correction instruction TPC is
20 produced by receiving means RX in the base station BS receiving the transmissions of the mobile station MS and control means MPC determining the transmission power correction instruction TPC which is then transmitted to the mobile station MS in the down-link DL.

The transmission power of the mobile station MS is not changed arbitrarily but in increments. If the mobile station MS has been previously transmitting with a transmission power P_x , the transmission power control either increases or reduces this transmission power for the subsequent transmission. If a transmission error occurs, the transmission power is maintained. Signaling the transmission power correction instruction TPC from the base station BS to the mobile station MS provides information on which of the three cases applies. However, the increase or decrease is only done with an increment ΔTPC which is not arbitrary but is predetermined. According to the invention, this increment ΔTPC is subscriber-dependent and time-dependent.

Three methods can be used for establishing the increment ΔTPC which, together with the transmission power correction instruction TPC and the previous transmission power, provides an unambiguous rule for adjusting the transmission power:

Method 1:

The increment ΔTPC to be used is also signaled. As long as no change in the increment ΔTPC is announced, the current increment ΔTPC is retained. The speed with which an increment ΔTPC can be newly set thus depends on the signaling capabilities.

Method 2:

The increment ΔTPC currently to be used is implicitly contained in the transmission power correction instruction TPC by means of appropriate coding. As shown in ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 8/25/1998, pages 29-30, the transmission power correction instruction, which only needs one bit (power + (increased) or power - (reduced)) is coded with two bits according to the prior art. The additional signaling of the increment

Δ TPC can be done either by using more than two bits for signaling or by reducing the redundancy in the signaling.

Method 3:

The increment ΔTPC to be used is firmly tied to certain events or transmission modes which are called transmission conditions in the text which follows. The link between transmission condition and increment ΔTPC is stored in an allocation table which is binding to both radio stations MS, BS.

In the text which follows, the determination of the increment ΔTPC is explained for some transmission conditions which previously produced an unsatisfactory control characteristic for the transmission power.

10 “slotted mode”

The so-called “slotted mode” in the FDD (frequency division duplex) mode, see also ETSI STC SMG2 UMTS-L1, Tdoc SMG2 UMTS-L1 221/98 of 8/25/1998, pages 33-34, describes an interruption of an otherwise continuous transmission for measuring purposes to prepare, for example, a handover of the mobile station MS to another base station BS. The interruption can occur in the up-link or the down-link. During the period of the interruption, the control loop is not effective so that on resumption of transmission, the transmission power previously set often deviates greatly from the optimum. To provide fast correction of the transmission power, the increment ΔTPC is temporarily increased after the interruption. Advantageously, the longer the interruption lasts the greater the increase.

20 According to Figure 2a, an increment ΔTPC of 0.5 dB normally applies which is increased to 1.5 dB with an interruption of 5 ms for three time slots or to 2.0 dB with an interruption of 10 ms before $\Delta\text{TPC} = 0.5$ dB again applies. This is predetermined according to Method 1 and thus

known both to the mobile station MS and the base station BS.

As an alternative, the increment ΔTPC to be used subsequently can also be signaled in the signaling announcing the "slotted mode" according to Figure 2b. The increment can be set in dependence on the duration of the interruption. Either the duration
5 of validity of the altered increment ΔTPC is predetermined, e.g., three time slots, or contained in the signaling. A further possibility is shown in Figure 2c where an expanded TPC coding, i.e., the implicit transmission of the increment ΔTPC together with the transmission power correction instruction TPC is used for providing for larger steps in the
10 transmission power correction for a period of three time slots or the rest of a frame.

Asymmetry with TDD

The TDD (time division duplex) mode of the radio communication system can assign time slots of a frame in a frequency band optionally to the up-link or to the down-link. Thus, the transmission capacity can be distributed to the up-link or the down-link in
15 accordance with demand so that asymmetric services are also supported well with optimum resource utilization. However, the asymmetry of the traffic also influences the control loop for the transmission power. In contrast to the FDD mode, there is not the possibility of planning predictable delays in the signaling of the transmission power correction instruction TPC due to the common frequency band for up-link and down-link. The greater
20 the asymmetry, the smaller the capability of the control loop to follow fast changes in the transmission conditions.

In consequence, the increment ΔTPC is determined in dependence on the asymmetry. With great asymmetry, a greater increment ΔTPC than with less asymmetry is established for accelerating the transmission power control according to Figure 3. With

little asymmetry, the increment ΔTPC is smaller for improving the accuracy of control. According to figure 3, method 3 is to be preferred. However, signaling according to method 1 is also possible since the asymmetry can only be changed in relatively great time intervals and there is relevant signaling in every case.

5

Speed of the mobile station

The so-called "fast fading" describes changes in the transmission conditions of the radio interface and its speed increases with increasing speed of the mobile station MS. Since even a fast transmission power control operates with a temporarily fixed increment ΔTPC , the effectiveness of a large increment ΔTPC decreases again with increasing speed of the mobile station MS. This is why, according to figure 4, a small increment ΔTPC of, e.g., 0.5 dB is established both with low speeds and with high speeds and a larger increment ΔTPC of, e.g., 1 dB is preferred at medium speeds. At low speeds, the accuracy of the transmission power control is good, and at medium speed the fast tracking of the transmission power for compensating for the fading is predominant. To establish the increment ΔTPC , method 1, i.e., the signaling of the increment ΔTPC by the base station BS to the mobile station MS is preferably used since the speed of the mobile station MS is estimated in the base station BS.

20 Diversity gain/fading variance

The dips in the received power produced by fast fading are limited by each diversity gain. Each diversity gain thus reduces the variance in the transmission power. The more diversity gains there are, the more the increment ΔTPC can be reduced. The diversity gain increases with

25 - an increase in the number of echoes used in the channel impulse response,

- an increase in the number of independent transmitting and receiving antennas,
- an increase in the length of time averaging by means of spreading or interleaving.

In comparison with the transmission of the transmission power correction instruction TPC, these measures are taken more rarely so that method 1 (signaling) is to be preferred. Figure 5 specifies an example for utilizing a different number of receiving antennas. If more than one receiving antenna is used, there is receiving antenna diversity. If the receiving end uses more than one antenna, a smaller increment ΔTPC can be used at the transmitting end. The increment ΔTPC is reduced by, e.g., 0.25 dB per signaling.

10 “soft handover”

The so-called soft handover describes a transmission condition in which a mobile station MS is not only in radio contact with one base station BS but, at least temporarily, with at least one further base station BS. During the soft handover, the information of the mobile station MS is received by more than one base station BS and, respectively, the information is transmitted by more than one base station BS, both in the up-link and in the down-link. The base stations BS responsible for a mobile station MS are entered in an active set. Thus, every time when a base station BS has been accepted in the active set or has been removed from it, there is an abrupt change in the macro diversity gain in the up-link and the down-link and in the total transmission power in the down-link. The transmission power adjustment should be able to follow this as quickly as possible.

If the active set is expanded, the transmission power should be reduced as quickly as possible so that the system is not unnecessarily loaded with interference. If the active set is reduced, the transmission powers should be raised quickly in order to ensure adequate signal quality.

In both cases, the increment ΔTPC is temporarily increased. It is then advantageous to increase the increment ΔTPC only in the direction of a reduction of the transmission power (- TPC) in the case of an expansion of the active set and to increase the increment ΔTPC only in the direction of an increase in the transmission power (+ TPC) in the case of a
5 reduction of the active set. The change in the increment ΔTPC can be greater in the down-link since in this case the total transmission power is also changed in addition to the diversity gain.

According to Figures 6a, 6b, 6c, all three methods can be used, the increase in the increment ΔTPC only being applied for a limited period, e.g., two time slots or the
10 remainder of the frame. After that, the most accurate possible transmission power setting with small increment ΔTPC should again be used.

Since the expansion or reduction of the active set is signaled by the base station BS, the increment ΔTPC can thus be established for the mobile station MS in accordance with a correspondence table, see Figure 6a. As an alternative, the change can be
15 signaled in accordance with Figure 6b or the transmission power adjustment can be improved by changing the coding of the transmission power correction instruction TPC according to Figure 6c.

According to Figure 7, the transmission power control for a transmission in the up-link can be described in a simplified way as follows:

20 After a connection has been set up, the transmission condition is determined by the control means MPC of the base station BS. Transmission in the up-link UL takes place by means of the transmission means TX of the mobile station MS. These transmissions are received by receiving means RX of the base station BS. Furthermore, the control means MPC interrogate whether the transmission condition has changed in the
25 meantime. If so, the

increment ΔTPC is newly determined and, if not, the increment ΔTPC set at the beginning of the connection is retained. Furthermore, the control means MPC determine the transmission power correction instruction TPC so that the transmission power correction instruction can be transmitted to the mobile station MS in the down link DL by transmission means TX of the base station BS.

The mobile station MS receives the transmission power correction instruction TPC and adjusts the transmission power appropriately for subsequent transmissions, taking into consideration the increment ΔTPC at the same time. The increment ΔTPC was either contained in the transmission power correction instruction TPC according to method 2, was signaled according to method 1, or could be reconstructed from the present transmission condition by the mobile station MS in accordance with method 3.

Patent claims

1. A method for controlling power in a radio communication system having a radio interface between a first and second radio station (BS, MS), in which the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),
the transmission power correction instruction (TPC) is transmitted to the second radio station (MS, BS) during a subsequent transmission of the first radio station (BS, MS) and
the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions, characterized in that the transmission power correction instruction (TPC) is referred to a variable increment (ΔTPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner.
2. The method as claimed in claim 1, characterized in that, in the radio stations (BS, MS), a transmission condition is evaluated repetitively in time for the second radio station (MS, BS) and the increment (ΔTPC) is increased or reduced with changes in the transmission condition.
3. The method as claimed in claim 2, characterized in that the transmission condition is influenced by an interruption of a continuous transmission mode for measuring purposes.
4. The method as claimed in claim 2, characterized in that the transmission condition is influenced by an asymmetry in the utilization of radio resources of the radio interface between up-link (UL) and down-link (DL).

5. The method as claimed in claim 2, characterized in that the transmission condition is influenced by a speed of the movement of a subscriber station (MS) representing the first or second radio station.
6. The method as claimed in claim 2, characterized in that the transmission
5 condition is influenced by the number of transmitting and/or receiving antennas used.
7. The method as claimed in claim 2, characterized in that the transmission condition is influenced by a length of time averaging of signal evaluation at the receiver end.
8. The method as claimed in claim 2, characterized in that the transmission
10 condition is influenced by a length of the channel impulse response used in the signal detection.
9. The method as claimed in claim 2, characterized in that the transmission condition is influenced by a number of base stations (BS) in radio contact with the subscriber station (MS) in a macro diversity transmission method.
- 15 10. The method as claimed in one of the preceding claims, characterized in that a CDMA transmission method in broadband transmission channels is used for the radio interface.
11. The method as claimed in one of the preceding claims, characterized in that the first radio station is a base station (BS) and the second radio station is a subscriber
20 station (MS).
12. The method as claimed in one of claims 1 to 10, characterized in that the first radio station is a subscriber

station (MS) and the second radio station is a base station (BS).

13. The method as claimed in one of the preceding claims, characterized in that the increment (ΔTPC) to be used is signaled.

14. The method as claimed in one of claims 1 to 12, characterized in that the
5 increment (ΔTPC) to be used is determined by the transmitted transmission power correction instruction (TPC).

15. The method as claimed in one of claims 1 to 12, characterized in that the increment (ΔTPC) to be used is established in accordance with a correspondence table or calculation rule linking the different transmission conditions with the increments (ΔTPC) to
10 be used.

16. A radio communication system comprising

- a first radio station (BS, MS) and a second radio station (MS, BS) which are connected to one another via a radio interface,
- transmitting means (TX), allocated to the second radio station (MS, BS), for
15 transmitting information, taking into consideration a transmission power correction instruction (TPC) for transmission power adjustment,
- receiving means (RX), allocated to the first radio station (BS, MS), for receiving the transmissions of the second radio station (MS), control means (MPC) for determining a transmission power correction instruction (TPC) for the transmission
20 power of the second radio station (MS) and transmission means (TX) for transmitting the transmission power correction instruction (TPC) during a subsequent transmission of the first radio station (BS, MS) to the second radio station (MS, BS),

characterized in that

the control means (MPC) of the first radio station (BS, MS) are constructed in such a manner that a transmission condition is evaluated for the second radio station (MS, BS) and, in the case of changes in the transmission condition, this increment (ΔTPC) is increased or reduced in a subscriber-dependent and time-dependent manner in the sense of a variable

5 increment (ΔTPC) of the transmission power adjustment.

Abstract

Method and radio communication system for controlling power between a base station and a subscriber station

5

According to the invention, the transmissions of the second radio station are received in the first radio station and a transmission power correction instruction is determined for the transmission power of the second radio station. The transmission power correction instruction is transmitted to the second radio station during a subsequent transmission of the first radio station, whereupon the latter takes the transmission power correction instruction into consideration for adjusting the transmission power during one of its subsequent transmissions. In contrast to the prior art, it is not a time-invariant and fixed increment which is used in changing the transmitting power but a transmission power correction instruction which is related to a variable increment of the transmission power adjustment.

10

The variable increment is set by the radio stations in a subscriber-dependent and time-dependent manner.

15

Fig. 1

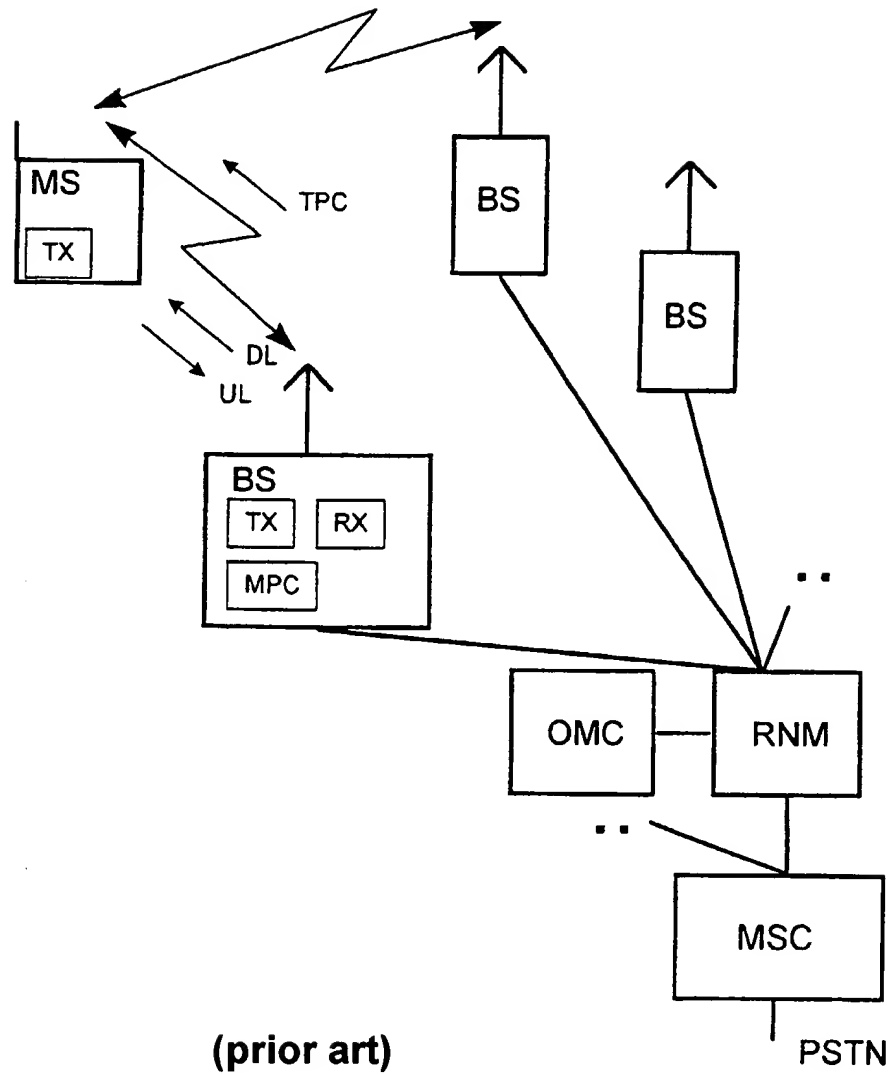


Fig. 2a

Method 3

Normal mode	e.g. $\Delta\text{TPC}=0.5\text{ dB}$
slotted mode with 5 ms interruption	e.g. $\Delta\text{TPC}=1.5\text{ dB}$ for three time slots, then 0.5 dB again
slotted mode with 10 ms interruption	e.g. $\Delta\text{TPC}=2.0\text{ dB}$ for three time slots, then 0.5 dB again

Fig. 2b

Method 2

Normal mode	e.g. $\Delta\text{TPC}=0.5\text{ dB}$
slotted mode with 5 ms interruption	ΔTPC announced in the signaling of the slotted mode for the agreed time, then 0.5 dB again
slotted mode with 10 ms interruption	ΔTPC announced in the signaling of the slotted mode for the agreed time, then 0.5 dB again

Fig. 2c

Method 1

Normal mode	e.g. $\Delta\text{TPC}=0.5\text{ dB}$ with normal TPC coding
slotted mode with 5 ms interruption	Use expanded TPC coding for e.g. three time slots or the remainder of the frame after the interruption
slotted mode with 10 ms interruption	Use expanded TPC coding for e.g. three time slots or the remainder of the frame after the interruption

Fig. 3

Time slot in DL	Time slot in UL	ΔTPC
15	1	2 dB
..
8	8	0,5 dB
..
2	14	2 dB

Fig. 4

estimated speed of MS	signaled ΔTPC
0 - 20 km/h	0,5 dB
20 - 80 km/h	1 dB
> 80 km/h	0,5 dB

Fig. 5

RX antenna diversity	Change in ΔTPC in MS (signaled)	Change in ΔTPC in BS
BS	-0,25 dB	0
MS	0	-0,25 dB
BS and MS	-0,25 dB	-0,25 dB

Fig. 6a

Method 3

	Δ TPC in BS	Δ TPC in BS	Δ TPC in MS	Δ TPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	0,5 dB	0,5 dB	0,5 dB	0,5 dB
Expansion of "active set"	0,5 dB	2.0 dB for two time slots, then 0.5 d.B	0,5 dB	1.0 dB for two time slots, then 0.5 dB
Reduction of "active set"	2.0 dB for two time slots, then 0.5 d.B	0,5 dB	1.0 dB for two time slots, then 0.5 dB	0,5 dB

Fig. 6b

Method 1


	Δ TPC in BS	Δ TPC in BS	Δ TPC in MS	Δ TPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	e.g. 0,5 dB	e.g. 0,5 dB	e.g. 0,5 dB	e.g. 0,5 dB
Expansion of "active set"	e.g. 0,5 dB	e.g. 2.0 dB for two time slots, then 0.5 d.B	e.g. 0,5 dB	is signaled
Reduction of "active set"	e.g. 2.0 dB for two time slots, then 0.5 d.B	e.g. 0,5 dB	is signaled	e.g. 0,5 dB

Fig. 6c

Method 2

	ΔTPC in BS	ΔTPC in BS	ΔTPC in MS	ΔTPC in MS
	+ TPC	- TPC	+ TPC	- TPC
Normal mode	e.g. 0,5 dB	e.g. 0,5 dB	e.g. 0,5 dB	e.g. 0,5 dB
Expansion and reduction of "active set"	use expanded TPC coding for e.g. 2 time slots or remainder of the frame after the interruption	(see ΔTPC and +TPC in BS)	(see ΔTPC and +TPC in BS)	(see ΔTPC and +TPC in BS)

Fig. 7

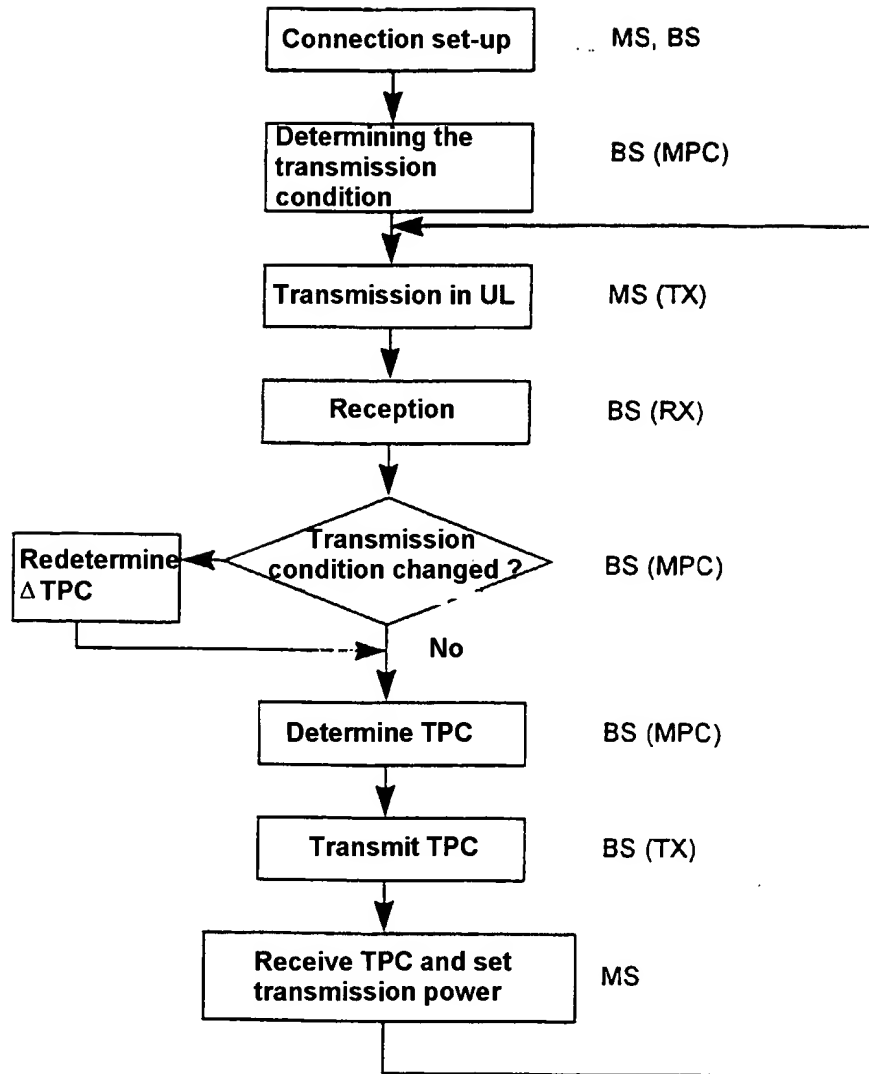

Patent claims

1. A method for controlling power in a radio communication system having a
5 radio interface between a first and second radio station (BS, MS), in which
 - the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),
 - the transmission power correction instruction (TPC) is transmitted to the second radio
10 station (MS, BS) during a subsequent transmission of the first radio station (BS, MS)
 - the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions,
 - the transmission power correction instruction (TPC) is referred to a variable increment
15 (Δ TPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner,
 - and a condition of the transmission between the radio stations is evaluated repetitively in time in the radio stations (BS, MS),
characterized in that
 - 20 - the transmission condition is an interruption of a continuous transmission for measuring purposes,
 - and the increment of the transmission power adjustment is temporarily increased after the end of the interruption.
2. The method as claimed in claim 1, in which the measure of the increase of the
25 increment is dependent on the length of the interruption.
3. A method for controlling power in a radio communication system having a
radio interface between a first and second radio station (BS, MS), in which
 - the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a
30 transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),
 - the transmission power correction instruction (TPC)
is transmitted to the second radio station (MS, BS) during a subsequent transmission of the first radio station (BS, MS),

- the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions,
- the transmission power correction instruction (TPC) is referred to a variable increment
- 5 (ΔTPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner,
- a condition of the transmission between the radio stations is evaluated repetitively in time in the radio station (BS, MS),
- and the transmission condition is a speed of the first or a second radio station,
- 10 characterized in that the increment is greater in a medium range of the speed than in a high range of the speed.
- 4. The method as claimed in claim 3, in which the increment is also greater in the medium range of the speed than in a low range of the speed.
- 5. A method for controlling power in a radio communication system having a
- 15 radio interface between a first and second radio station (BS, MS), in which
- the transmissions of the second radio station (MS, BS) are received in the first radio station (BS, MS) and a transmission power correction instruction (TPC) is determined for the transmission power of the second radio station (MS, BS),
- the transmission power correction instruction (TPC) is transmitted to the second radio
- 20 station (MS, BS) during a subsequent transmission of the first radio station (BS, MS)
- the second radio station (MS, BS) takes the transmission power correction instruction (TPC) into consideration for adjusting the transmission power during one of its subsequent transmissions,
- the transmission power correction instruction (TPC) is referred to a variable increment
- 25 (ΔTPC) of the transmission power adjustment which is adjusted by the radio stations (BS, MS) in a subscriber-dependent and time-dependent manner,
- and a condition of the transmission between the radio stations is evaluated repetitively in time in the radio stations (BS, MS), characterized in that

- the transmission condition is the number of transmitting and/or receiving antennas used for a connection,

- and the increment is changed in the case of a change of the number of transmitting and/or receiving antennas used for a connection.

- 5 6. The method as claimed in claim 5, characterized in that the number of the antennas used for the connection is changed by changing the number of the base stations (BS) which are in radio contact with the subscriber station (MS) in the case of a macro diversity transmission method.
- 10 7. The method as claimed in claim 6, in which the increment is only increased for reducing the transmission power in the case of an increase in the number of base stations which are in radio contact with the subscriber station.
- 15 8. The method as claimed in claim 6, in which the increment is only increased for increasing the transmission power in the case of a reduction in the number of base stations which are in radio contact with the subscriber station.
- 15 9. The method as claimed in one of the preceding claims, characterized in that a

CDMA transmission method in broadband transmission channels is used for the radio interface.

10. The method as claimed in one of the preceding claims, characterized in that the first radio station is a base station (BS) and the second radio station is a subscriber station (MS).
- 5 11. The method as claimed in one of claims 1 to 9, characterized in that the first radio station is a subscriber station (MS) and the second radio station is a base station (BS).
12. The method as claimed in one of the preceding claims, characterized in that the increment (ΔTPC) to be used is signaled.
- 10 13. The method as claimed in one of claims 1 to 11, characterized in that the increment (ΔTPC) to be used is determined by the transmitted transmission power correction instruction (TPC).
14. The method as claimed in one of claims 1 to 11, characterized in that the increment (ΔTPC) to be used is established in accordance with a correspondence table or
- 15 calculation rule linking the different transmission conditions with the increments (ΔTPC) to be used.